

Slide 1

A large, white Sharp multifunction copier with a control panel featuring a color touchscreen and several physical buttons. The copier has multiple paper trays at the bottom and a document feeder on top.


**mv™**  
**SHARP**

# Managing Fax Destinations.

A group of business professionals in a modern office setting, with a man standing and pointing at a laptop held by a seated woman, while others look on.

<u>ESSENTIALS</u>	<u>ADVANCED</u>
MX-2651	MX-3071
MX-3051	MX-3571
MX-3551	MX-4071
MX-4051	

## Slide 2

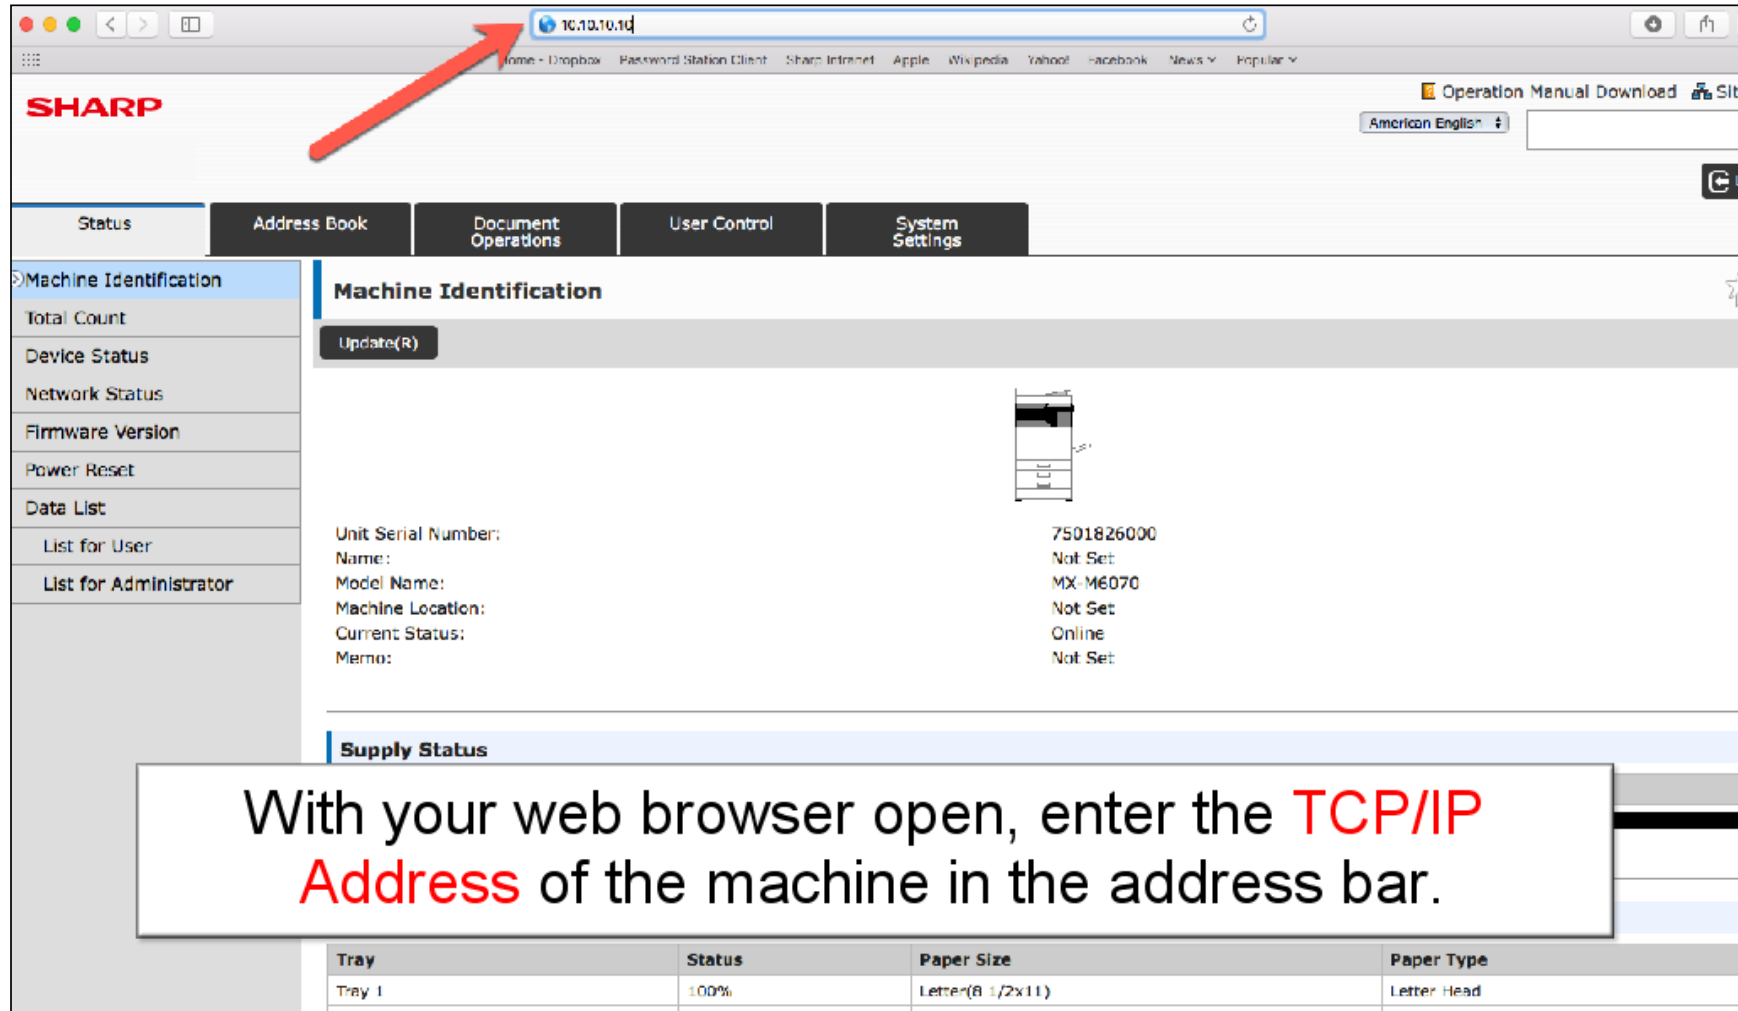


The screenshot shows a web browser window displaying the Sharp MX-M6070 web interface. The address bar contains the IP address **10.10.10.10**, which is highlighted by a red arrow. The interface features a sidebar on the left with the following menu items: Machine Identification (selected), Total Count, Device Status, Network Status, Firmware Version, Power Reset, Data List, List for User, and List for Administrator. The main content area is titled 'Machine Identification' and includes an 'Update(R)' button. Below this, there is a diagram of the machine and a list of details: Unit Serial Number (7501826000), Name (Not Set), Model Name (MX-M6070), Machine Location (Not Set), Current Status (Online), and Memo (Not Set). At the bottom, there is a 'Supply Status' table.

Tray	Status	Paper Size	Paper Type
Tray 1	100%	Letter(8 1/2x11)	Letter Head

With your web browser open, enter the **TCP/IP Address** of the machine in the address bar.

Slide 3

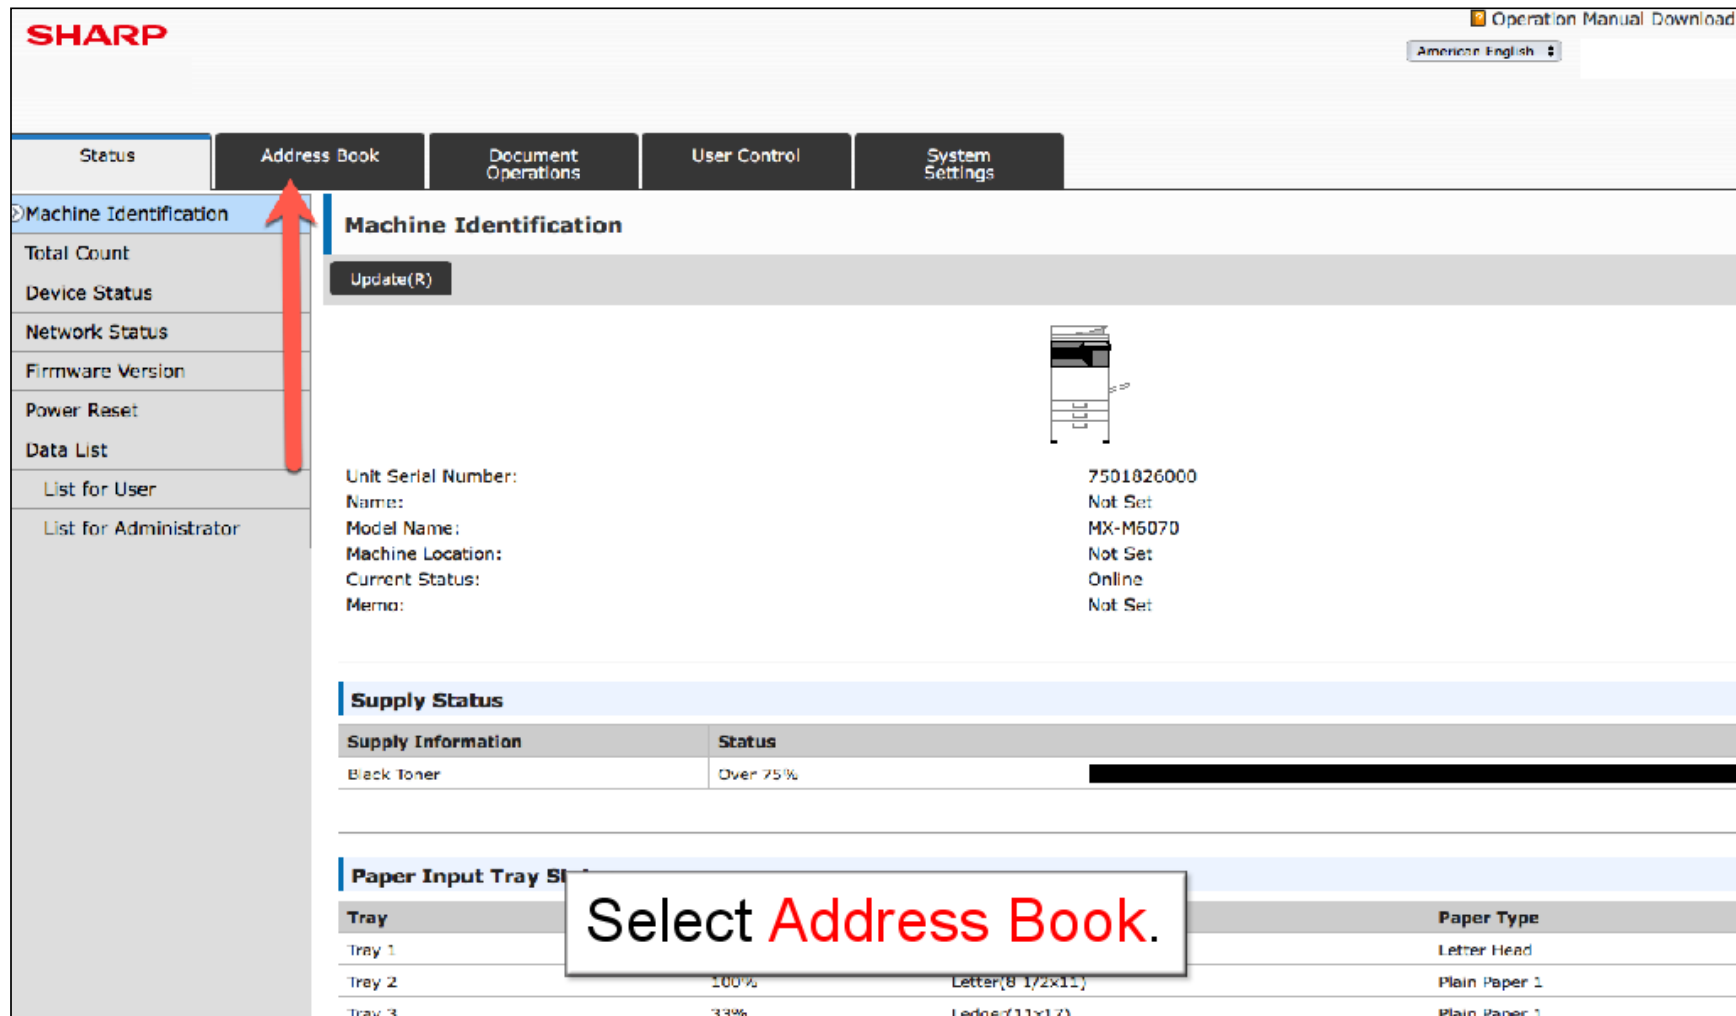

**SHARP** Operation Manual Download  
American English

Status Address Book Document Operations User Control System Settings

Machine Identification

Update(R)

Unit Serial Number: 7501826000  
Name: Not Set  
Model Name: MX-M507D  
Machine Location: Not Set  
Current Status: Online  
Memo: Not Set

**Supply Status**

Supply Information	Status
Black Toner	Over 75%

**Paper Input Tray Status**

Tray	Capacity	Current Paper	Paper Type
Tray 1			Letter Head
Tray 2	100%	Letter(8 1/2x11)	Plain Paper 1
Tray 3	33%	Ledge(11x17)	Plain Paper 1

Select Address Book.

Slide 4

Status

Address Book

Document Operations

User Control

System Settings

Address Book

Category Setting

Address Book

Update(R)

Item to be Displayed: All

Index: All Destinations

Display Items: 10

Address Name ▲ ▼	Type ▲ ▼	E-mail Address	Fax Number	Scanner Address	No. ▲ ▼
<input type="checkbox"/> Sample1	Contacts	sample1@internet.com	-----	-----	100
<input type="checkbox"/> Sample2	Contacts	sample2@internet.com	-----	-----	300
<input type="checkbox"/> Sample3	Contacts	sample3@internet.com	-----	-----	301

Total Address: 3

Previous(M) 1 / 1 Next(N)

Select All(I) Clear Checked(K)

Add(Y) Delete(O) Detail(I)

Update(R)

Select Add.

## Slide 5

Address Book

Category Setting

### Address Registration

Submit(U)

Submit and Register Next(C)

Back(Q)

Type: Contacts ▼

---

Search Number:  (1-2000)

Address Name (Required):  (Up to 36 characters)

Initial:  (Up to 10 characters)

Category: Category1 ▼

The category name can be changed in the [\[Category Setting\]](#).

☐ Register this Address to be added to the [\[Frequent Use\]](#) index.

Address	Type	Set as Default used
No.		

E-mail

Fax

FTP

Desktop

Network Folder

Number of Registrations:0

E-mail Address: New Address ▼  (Up to 255 characters)

E-mail Address (Required):  (Up to 255 characters)

Search(X)

File Type: PDF ▼



Select Fax.

## Slide 6

Address Book

Category Setting

### Address Registration

Submit(U)

Submit and Register Next(C)

Back(Q)

Type:

Contacts

Contacts

Group

Search Number:

(1-2000)

Address Name (Required):

(Up to 36 characters)

Initial:

(Up to 10 characters)

Category:

Category1

The category name can be changed in the [\[Category Setting\]](#).

☐ Register this Address to be added to the [\[Frequent Use\]](#) index.

Address	Type	Set as Default used
Not Set		

E-mail

Fax

FTP

Desktop

Network Folder

Number of Registrations:0

Fax Number:

Fax Number (Required):

Select Contacts.

(Up to 64 characters)

Global Address Search(Z)

Transmission Mode:

Transmission Speed: 33.6 kbps

## Slide 7

Address Book

Category Setting

Address Registration

Submit(U) Submit and Register Next(C) Back(Q)

Type: Contacts

Search Number: 501 (1-2000)

Address Name (Required): (Up to 36 characters)

Initial: (Up to 10 characters)

Category: Category1

The category name can be changed in the [Category Setting].

☐ Register this Address to be added to the [Frequent Use] index.

Address	Type	Set as Default used
Not Set		

E-mail Fax FTP Desktop Network Folder

Number of Registrations:0

Fax Number: New Address

Fax Number (Required) (Up to 64 characters)

Transmission Mode: Transmission Speed: 33.6 kbps

Enter a Search Number.

## Slide 8

Address Book

Category Setting

### Address Registration

Submit(U)

Submit and Register Next(C)

Back(Q)

Type: 

Contacts ▼

Search Number: 

501

 (1-2000)

Address Name (Required) 

Sample Fax

 (Up to 36 characters)

Initial: 

S

 (Up to 10 characters)

Category: 

Category1 ▼

The category name can be changed in the [\[Category Setting\]](#).

☐ Register this Address to be added to the [\[Frequent Use\]](#) index.

Address	Type	Set as Default used
Not Set		

E-mail

Fax

FTP

Desktop

Network Folder

Number of Registrations:0

Fax Num

Fax Num

Global Address Search(Z)

Transmission Mode:

Transmission Speed: 33.6 kbps ▼

Enter a **Name** for the destination. characters)





## Slide 10

Address Book

Category Setting

Address Name (Required):

Sample Fax

(Up to 36 characters)

Initial:

S

(Up to 10 characters)

Category:

Category1

The category name can be changed in the [\[Category Setting\]](#).

☒ Register this Address to be added to the [\[Frequent Use\]](#) index.

Address	Type	Set as Default used
Not Set		

E-mail

Fax

FTP

Desktop

Netw

Folder

Number of Registrations:0

Fax Number:

New Address

Fax Number (Required):

(Up to 64 characters)

Global Address Search(Z)

Transmission Mode:

Transmission Speed: 33,6 kbps

Transmission Mode:

None

☒ Set as Default used

Delete This Address.(X)

Select New Address.

Notice:If ended up with the settings will be also cleared/deleted.

## Slide 11

Address Book

Category Setting

Address Name (Required):

Sample Fax

(Up to 36 characters)

Initial:

S

(Up to 10 characters)

Category:

Category1

The category name can be changed in the [\[Category Setting\]](#).

☒ Register this Address to be added to the [\[Frequent Use\]](#) index.

Address	Type	Set as Default used
Not Set		

E-mail

Fax

FTP

Desktop

Network Folder

Number of Registrations:0

Fax Number:

New Address

Fax Number (Required):

524-777-3257

(Up to 64 characters)

Global Address Search(Z)

Transmission Mode:

Transmission Speed: 33.6 kbps

Transmission Mode:

None

☒ Set as Default used

Delete This Address.(X)

Enter a Fax Number.

Notice:If ended up with the settings will be also cleared/deleted.



## Slide 12

Address Book

Category Setting

Address Name (Required):

Sample Fax

(Up to 36 characters)

Initial:

S

(Up to 10 characters)

Category:

Category1

The category name can be changed in the [Category Setting].

☒ Register this Address to be added to the [Frequent Use] index.

Address	Type	Set as Default used
Not Set		

E-mail

Fax

FTP

Desktop

Network Folder

Number of Registrations:0

Fax Number:

New Address

Fax Number (Required):

524-777-3257

(Up to 64 characters)

Global Address Search(Z)

Transmission Mode:

Transmission Speed:

33.6 kbps

14.4 kbps

9.6 kbps

4.8 kbps

Transmission Mode:

☒ Set as Default used

Delete

Select a Transmission Speed.

Notice:If ended up with no destination upon deleting addresses used in various settings, the settings will be also cleared/deleted.

## Slide 13

Address Book

Category Setting

Address Name (Required):

Sample Fax

(Up to 36 characters)

Initial:

S

(Up to 10 characters)

Category:

Category1

The category name can be changed in the [\[Category Setting\]](#).

☒ Register this Address to be added to the [\[Frequent Use\]](#) index.

Address	Type	Set as Default used
Not Set		

E-mail

Fax

FTP

Desktop

Network Folder

Number of Registrations:0

Fax Number:

New Address

Fax Number (Required):

524-777-3257

(Up to 64 characters)

Global Address Search(Z)

Transmission Mode:

Transmission Speed: 33,6 kbps

Transmission Mode:

None

Mode1

Mode2

Mode3

☒ Set as Default used

Delete This Address

Select a Transmission Mode.

Notice:If an address is deleted, the address will be also cleared/deleted.

## Slide 14

**Category Setting**

Initial:  (Up to 10 characters)

Category:

The category name can be changed in the [\[Category Setting\]](#).

☒ Register this Address to be added to the [\[Frequent Use\]](#) index.

Address	Type	Set as Default used
Not Set		

Number of Registrations:0

Fax Number:

Fax Number (Required):  (Up to 64 characters)

Transmission Mode:

Transmission Mode:

☒ Set as Default used

Notice: If ended u...tings will be also cleared/deleted.

**Select Add This Address.**

## Slide 15

Address Book

Category Setting

### Address Registration

Submit(U)

Submit and Register Next(C)

Back(Q)

**"Your request was successfully processed."**

Type: 

Contacts ▼

---

Search Number: 

501

 (1-2000)

Address Name (Required): 

Sample Fax

 (Up to 36 characters)

Initial: 

S

 (Up to 10 characters)

Category: 

Category1 ▼

The category name can be changed in the [\[Category Setting\]](#).

☒ Register this Address to be added to the [\[Frequent Use\]](#) index.

Address	Type	Set as Default used
524-777-3257	Fax	✓

E-mail

Fax

FTP

Desktop

Network Folder

Number of Registrations:1

A confirmation message is displayed.

Global Address Search(Z)

Slide 16

Address Book

Category Setting

Address Registration

Submit(U) Submit and Register Next(C) Back(Q)

"Your request was successfully processed."

Type: Contacts

Search Number: 501 (1-2000)

Address Name (Required): Sample Fax (Up to 36 characters)

Initial: S (Up to 10 characters)

Category: Category1

The category name can be changed in the [Category Setting].

☒ Register this Address to be added to the [Frequent Use] index.

Address	Type	Set as Default used
524-777-3257	Fax	✓

E-mail Fax FTP Desktop Network Folder

Number of Registrations:1

Fax Number:

Fax Number (Required)

Global Address Search(Z)

**Select Address Book.**



Slide 17

Address Book

Category Setting

Address Book

Update(R)

Item to be Displayed: All

Index: All Destinations

Display Items: 10

Address Name ▲ ▼	Type ▲ ▼	E-mail Address	Fax Number	Scanner Address	No. ▲ ▼
<input type="checkbox"/> Sample1	Contacts	sample1@internet.com	-----	-----	100
<input type="checkbox"/> Sample2	Contacts	sample2@internet.com	-----	-----	300
<input type="checkbox"/> Sample3	Contacts	sample3@internet.com	-----	-----	301
<input type="checkbox"/> Sample Fax	Contacts	-----	524-777-3257	-----	501

Total Address: 4

Previous(M) 1 / 1 Next(N)

Select All(S) Clear Checked(K)

Add(Y) Delete(O) Detail(J)

Select the destination that was added.

## Slide 18

Address Book

Category Setting

Address Registration

Submit(U) Submit and Register Next(C) Back(Q)

Type: Contacts

Search Number: 501 (1-2000)

Address Name (Required): Sample Fax (Up to 36 characters)

Initial: S (Up to 10 characters)

Category: Category1

The category name can be changed in the [Category Setting].

☒ Register this Address to be added to the [Frequent Use] index.

Address	Type	Set as Default used
524-777-3257	Fax	✓

E-mail Fax FTP Desktop Network Folder

Number of Registrations:0

Make any necessary changes. Select **Submit**.

Global Address Search(X)

File Type: PDF

## Slide 19

Address Book

Category Setting

### Address Registration

Submit(U)

Submit and Register Next(C)

Back(Q)

**"Your request was successfully processed."**

Type:

---

Search Number:  (1-2000)

Address Name (Required):  (Up to 36 characters)

Initial:  (Up to 10 characters)

Category:

The category name can be changed in the [\[Category Setting\]](#).

☒ Register this Address to be added to the [\[Frequent Use\]](#) index.

Address	Type	Set as Default used
524-777-3257	Fax	✓

E-mail

Fax

FTP

Desktop

Network Folder

Number of Registrations:0

A confirmation message is displayed.

characters)

Global Address Search(X)

Slide 20

Address Book

Category Setting

Address Registration

Submit(U) Submit and Register Next(C) Back(Q)

**"Your request was successfully processed."**

Type: 

Contacts

Search Number: 

501

 (1-2000)

Address Name (Required): 

Sample Fax

 (Up to 36 characters)

Initial: 

S

 (Up to 10 characters)

Category: 

Category1

The category name can be changed in the [\[Category Setting\]](#).

☒ Register this Address to be added to the [\[Frequent Use\]](#) index.

Address	Type	Set as Default used
524-777-3257	Fax	✓

E-mail

Fax

FTP

Desktop

Network Folder

Number of Registrations:0

E-mail Address: 

Select Address Book.

 (Up to 255 characters)

E-mail Address (Requ

Global Address Search(X)

## Slide 21

Address Book

Category Setting

Address Book

Update(R)

Item to be Displayed: All

Index: All Destinations

Display Items: 10

Address Name ▲ ▼	Type ▲ ▼	E-mail Address	Fax Number	Scanner Address	No. ▲ ▼
<input type="checkbox"/> Sample1	Contacts	sample1@internet.com	-----	-----	100
<input type="checkbox"/> Sample2	Contacts	sample2@internet.com	-----	-----	300
<input type="checkbox"/> Sample3	Contacts	sample3@internet.com	-----	-----	301
<input checked="" type="checkbox"/> Sample Fax	Contacts	-----	524-777-3257	-----	501

Total Address: 4

Previous(M) 1 / 1 Next(N)

Select All(S) Clear Checked(K)

Add(Y) Delete(O) Detail(J)

Update(R)

Select the destination. Select **Delete**.

Slide 22

Status

Address Book

Document Operation

Address Book

Category Setting

Update(R)

Item to be Displayed: All

Index: All Destinations

Display Items: 10

Address Name ▲ ▼	Type ▲ ▼	E-mail Address	Fax Number	Scanner Address	No. ▲ ▼
<input type="checkbox"/> Sample1	Contacts	sample1@internet.com	-----	-----	100
<input type="checkbox"/> Sample2	Contacts	sample2@internet.com	-----	-----	300
<input type="checkbox"/> Sample3	Contacts	sample3@internet.com	-----	-----	301
<input checked="" type="checkbox"/> Sample Fax	Contacts	-----	524-777-3257	-----	501

Total Address: 4

Previous(M) 1 / 1 Next(N)

Select All(S) Clear Checked(K)

Add(Y) Delete(O) Detail(J)

Update(R)

Delete "Sample Fax"?

OK Cancel

Select OK.

## Slide 23

Status

Address Book

Document Operations

User Control

System Settings

Address Book

Category Setting

Update(R)

"Your request was successfully processed."

Item to be Displayed: All

Index: All Destinations

Display Items: 10

Address Name ▲ ▼	Type ▲ ▼	E-mail Address	Fax Number	Scanner Address	No. ▲ ▼
<input type="checkbox"/> Sample1	Contacts	sample1@internet.com	-----	-----	100
<input type="checkbox"/> Sample2	Contacts	sample2@internet.com	-----	-----	300
<input type="checkbox"/> Sample3	Contacts	sample3@internet.com	-----	-----	301

Total Address: 3

Previous(M) 1 / 1 Next(N)

Select All(S) Clear Checked(K)

A confirmation message is displayed.

Update(R)

Slide 24



The advertisement features a dark teal background with a semi-transparent image of a business meeting. In the top left corner is the Sharp logo, consisting of a stylized 'm' and 'v' in a square followed by 'TM' and the word 'SHARP' in red. To the right of the logo, the text 'Congratulations, you have Managed Fax Destinations.' is displayed in white. On the right side of the slide is a large, white Sharp multifunction copier with a color touchscreen interface. At the bottom left, there are two columns of model numbers under the headings 'ESSENTIALS' and 'ADVANCED'.

**ESSENTIALS**

- MX-2651
- MX-3051
- MX-3551
- MX-4051

**ADVANCED**

- MX-3071
- MX-3571
- MX-4071