

Slide 1


Multi-Language Display.



The image shows two Sharp MX-B376W and MX-B476W multi-function copiers in a modern office environment. The copiers are white with black accents and feature a multi-language display. The background shows a blurred office scene with people working at desks. The Sharp logo is visible in the top right corner.

MX-B376W
MX-B476W

Slide 2

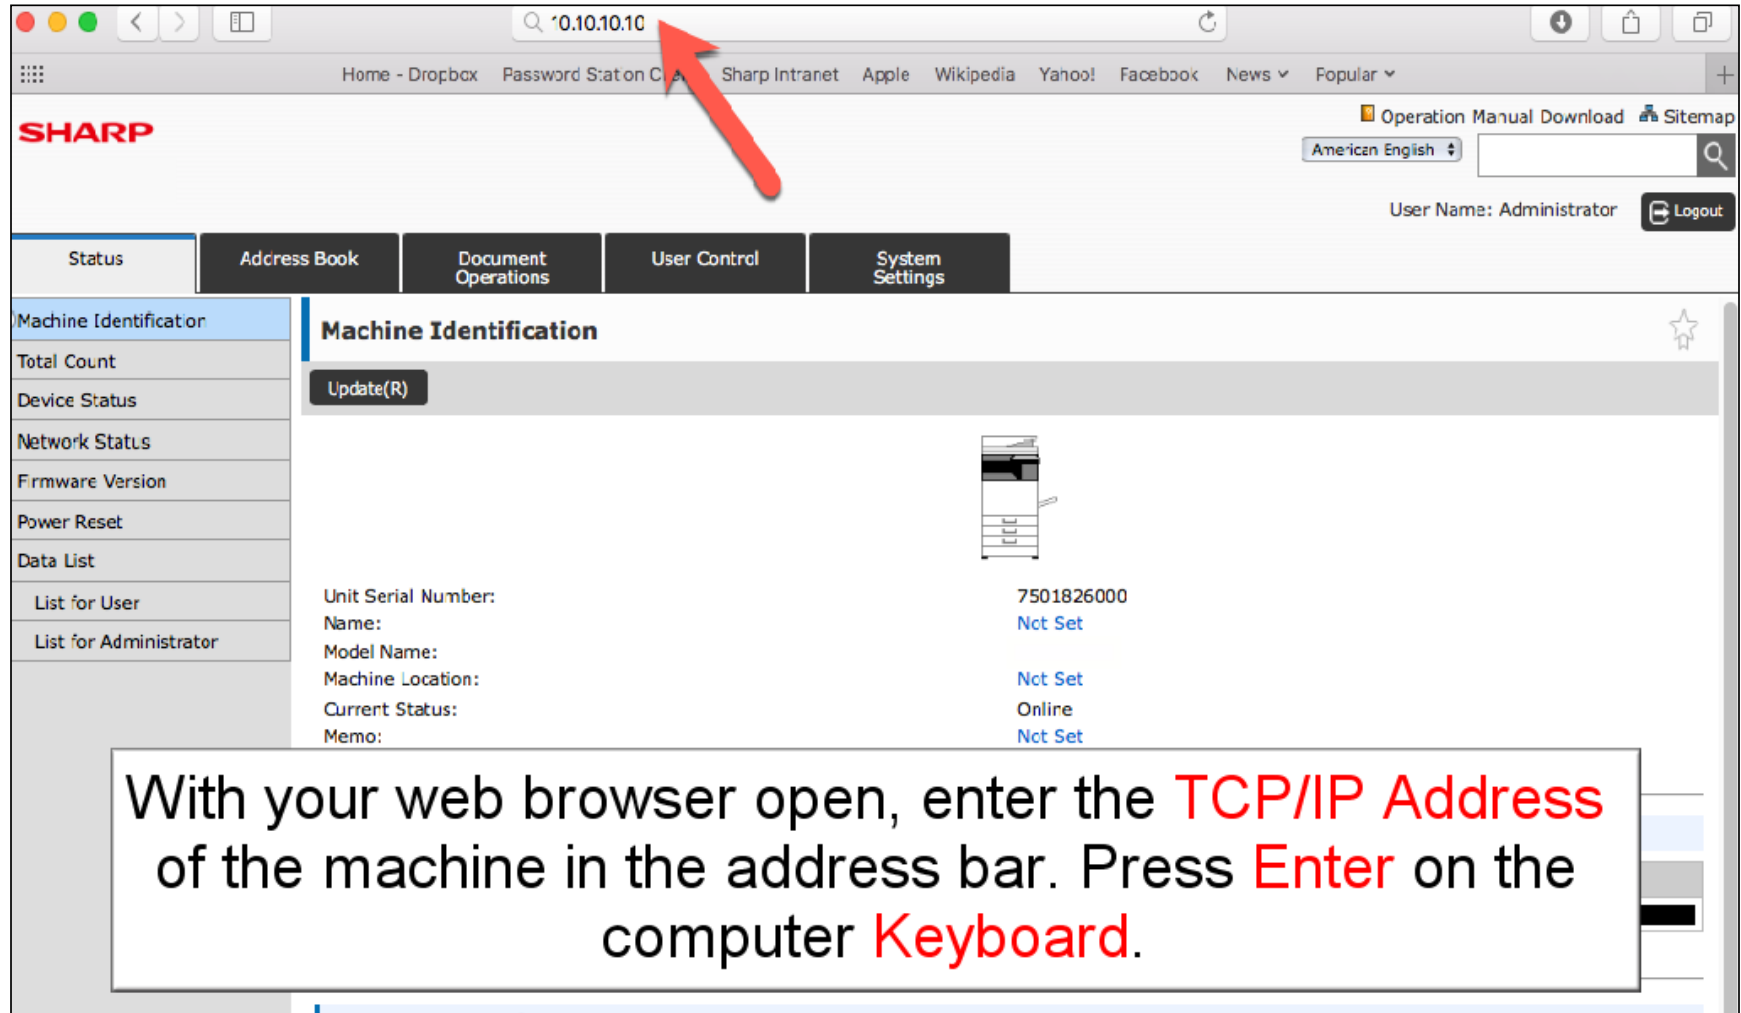

The screenshot shows a web browser window with the address bar containing '10.10.10.10'. A red arrow points to the address bar. The browser's address bar also shows '10.10.10.10'. The page title is 'SHARP'. The page content includes a navigation bar with links: Home - Dropbox, Password Stat on C, Sharp Intranet, Apple, Wikipedia, Yahoo!, Facebook, News, Popular. The main content area is titled 'Machine Identification' and includes a sidebar with links: Machine Identification, Total Count, Device Status, Network Status, Firmware Version, Power Reset, Data List, List for User, List for Administrator. The main content area displays the following information:

Unit Serial Number:	7501826000
Name:	Nct Set
Model Name:	Nct Set
Machine Location:	Nct Set
Current Status:	Online
Memo:	Nct Set

With your web browser open, enter the **TCP/IP Address** of the machine in the address bar. Press **Enter** on the computer **Keyboard**.


Slide 3

SHARP Operation Manual Download American English User Name: Administrator

Status **Address Book** **Document Operations** **User Control** **System Settings**

Machine Identification

[Update\(R\)](#)



Unit Serial Number: 7501826000
Name: Not Set
Model Name: Not Set
Machine Location: Not Set
Current Status: Online
Memo: Not Set

Supply Status


Supply Information	Status
Black Toner	Over 75% 

Paper Input Tray

Tray	Percentage	Paper Type
Tray 1	100%	Letter(8 1/2x11)

Select System Settings.

Slide 4

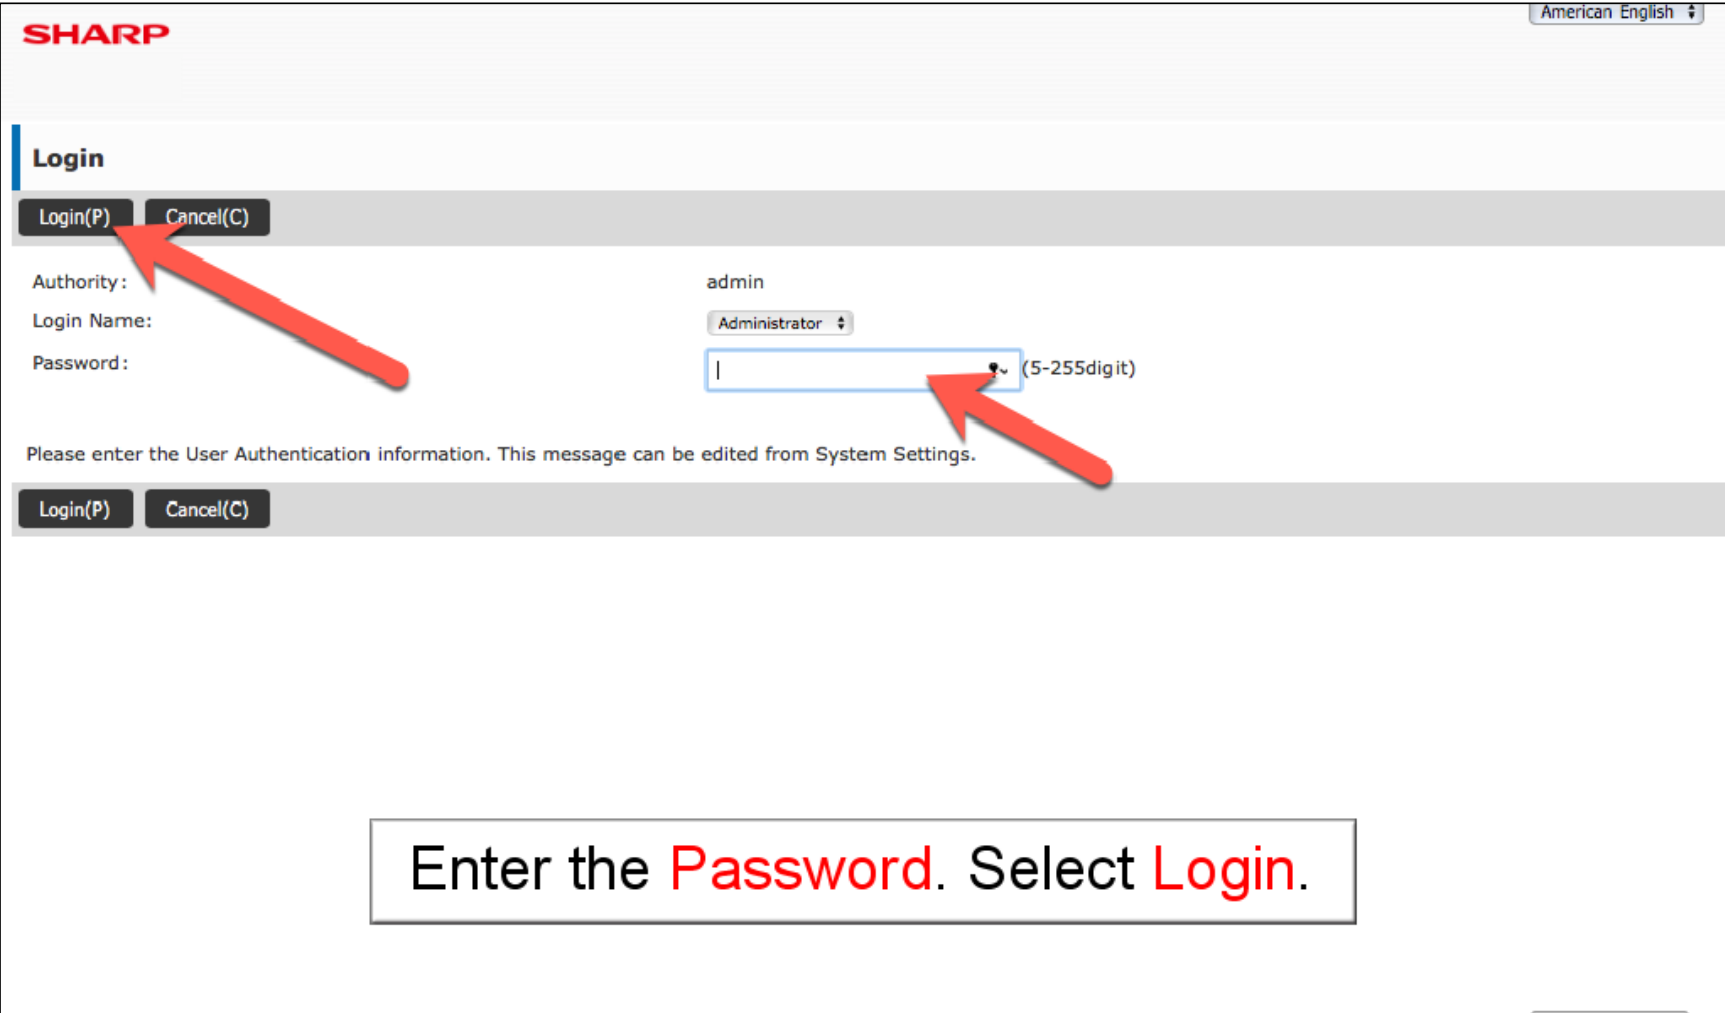

The image shows a SHARP login interface. At the top left is the SHARP logo. At the top right is a language dropdown menu set to "American English". Below the logo is a "Login" section. It contains two buttons: "Login(P)" and "Cancel(C)". Below these buttons are labels for "Authority:", "Login Name:", and "Password:". The "Authority:" field is set to "admin". The "Login Name:" field is a dropdown menu set to "Administrator". The "Password:" field is a text input box with a password strength indicator "(5-255digit)". A red arrow points from the "Login(P)" button to the "Password:" field. Below the input fields is a message: "Please enter the User Authentication information. This message can be edited from System Settings." Below this message are two buttons: "Login(P)" and "Cancel(C)". At the bottom of the form is a text box with the instruction: "Enter the Password. Select Login."

SHARP

American English

Login

Login(P) Cancel(C)

Authority: admin

Login Name: Administrator


Password: (5-255digit)

Please enter the User Authentication information. This message can be edited from System Settings.

Login(P) Cancel(C)

Enter the Password. Select Login.

Slide 5

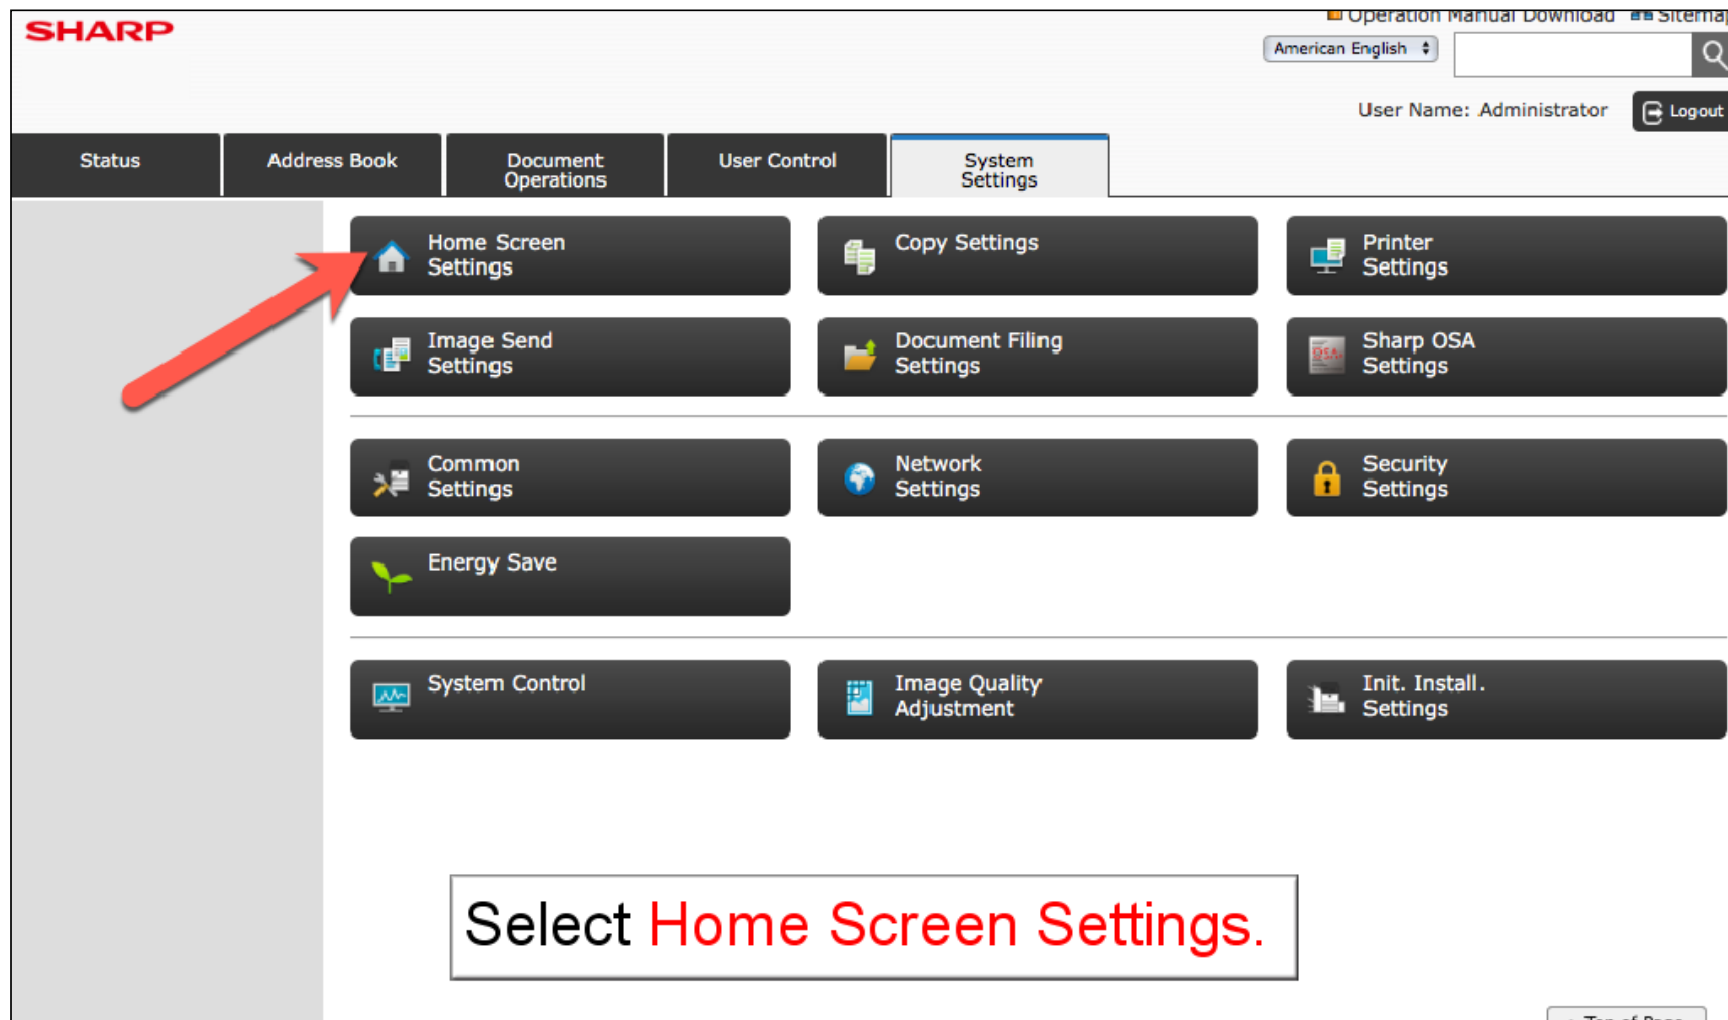

The screenshot shows the SHARP My Viewlet interface. At the top, there is a header with the SHARP logo, a language dropdown set to 'American English', a search bar, and a 'Logout' button. Below the header is a navigation bar with tabs: Status, Address Book, Document Operations, User Control, and System Settings (which is currently selected). The main content area displays a grid of settings buttons. A large red arrow points to the 'Home Screen Settings' button, which is the first button in the grid. Other buttons include Copy Settings, Printer Settings, Image Send Settings, Document Filing Settings, Sharp OSA Settings, Common Settings, Network Settings, Security Settings, Energy Save, System Control, Image Quality Adjustment, and Init. Install. Settings. At the bottom of the page, there is a text box with the instruction 'Select Home Screen Settings.' and a 'Top of Page' link.

SHARP

Operation Manual Download Sitemap

American English

User Name: Administrator Logout

Status Address Book Document Operations User Control System Settings

Home Screen Settings

Copy Settings

Printer Settings

Image Send Settings

Document Filing Settings

Sharp OSA Settings

Common Settings

Network Settings

Security Settings

Energy Save

System Control

Image Quality Adjustment

Init. Install. Settings

Select Home Screen Settings.


Top of Page

Slide 6

Status	Address Book	Document Operations	User Control	System Settings																						
Home Screen Settings	3. Clock: ☐ White ☒ Black																									
Condition Settings	In the Condition Settings, scroll down to the Home Buttons. Select the button to be configured as a Language Button.																									
Icon																										
Background Image	Submit(U) <table border="1"><thead><tr><th>No.</th><th></th></tr></thead><tbody><tr><td>11</td><td>Address Book</td></tr><tr><td>12</td><td>Scan to HDD</td></tr><tr><td>13</td><td>HDD File retrieve</td></tr><tr><td>14</td><td>Paper Tray Settings</td></tr><tr><td>15</td><td>Address Control</td></tr><tr><td>16</td><td>Program List (Image Send)</td></tr><tr><td>17</td><td>photo</td></tr><tr><td>18</td><td>Not Set</td></tr><tr><td>19</td><td>Not Set</td></tr><tr><td>20</td><td>Not Set</td></tr></tbody></table> Previous(M) 2 / 6 Next(N)				No.		11	Address Book	12	Scan to HDD	13	HDD File retrieve	14	Paper Tray Settings	15	Address Control	16	Program List (Image Send)	17	photo	18	Not Set	19	Not Set	20	Not Set
No.																										
11	Address Book																									
12	Scan to HDD																									
13	HDD File retrieve																									
14	Paper Tray Settings																									
15	Address Control																									
16	Program List (Image Send)																									
17	photo																									
18	Not Set																									
19	Not Set																									
20	Not Set																									

No.	Fix Key
1	Fix Key

Slide 7

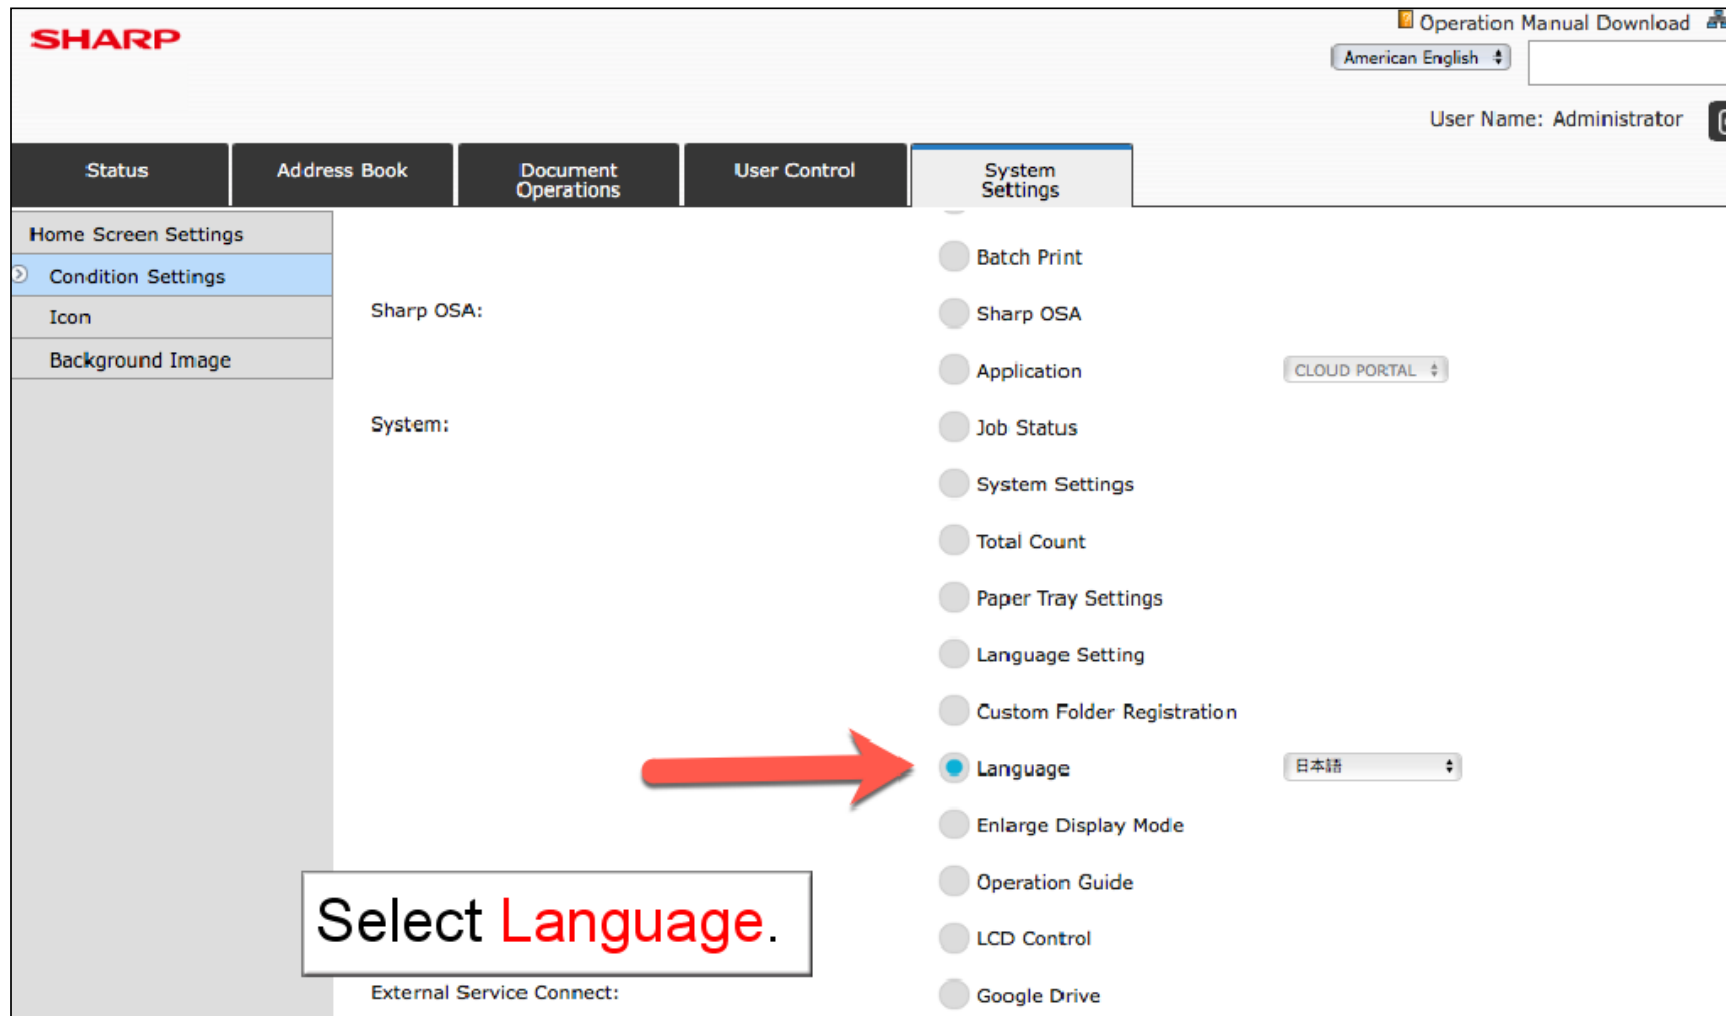

SHARP

Operation Manual Download

American English

User Name: Administrator

Status Address Book Document Operations User Control System Settings

Home Screen Settings

Condition Settings

Icon

Background Image

Sharp OSA:

System:

Batch Print

Sharp OSA

Application CLOUD PORTAL

Job Status

System Settings

Total Count

Paper Tray Settings

Language Setting

Custom Folder Registration

Language 日本語

Enlarge Display Mode

Operation Guide


LCD Control

Google Drive

Select Language.

External Service Connect:

Slide 8

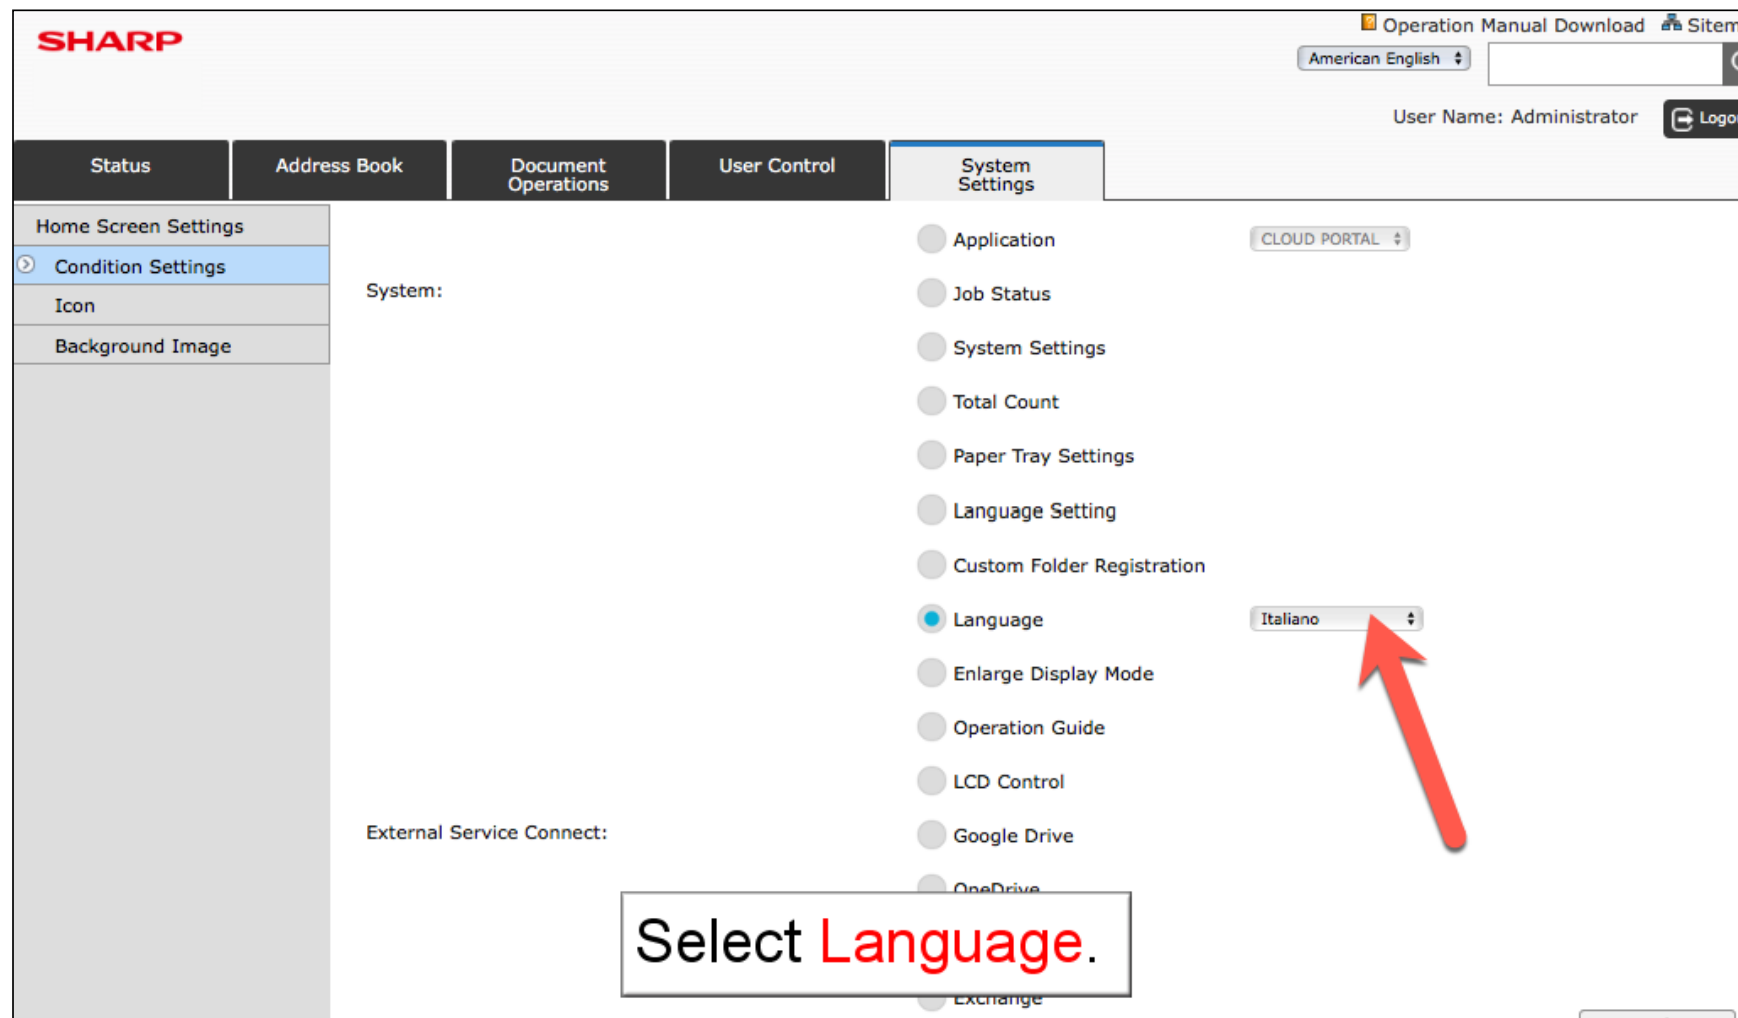

SHARP

Operation Manual Download Site

American English

User Name: Administrator

Logout

Status Address Book Document Operations User Control System Settings

Home Screen Settings

Condition Settings

Icon

Background Image

System:

Application

Job Status

System Settings

Total Count

Paper Tray Settings

Language Setting

Custom Folder Registration

Language

Enlarge Display Mode

Operation Guide

LCD Control

Google Drive

OneDrive

Exchange

External Service Connect:

Italiano

Select Language.

Slide 9

SHARP

Operation Manual Download

American English

User Name: Administrator

Status Address Book Document Operations User Control System Settings

Home Screen Settings

Condition Settings

Icon

Background Image

Home Screen Registration

Submit(U) Cancel(C) Back to Menu

Home Button No.18: Not Set

Copy:

- ☐ None
- ☐ Easy Copy
- ☐ Copier
- ☐ Program List
- ☐ Program

Printer:

- ☐ Print Release
- ☐ Mode Key
- ☐ Program List
- ☐ Program

Image Send:


Pre-Setting Program

Easy Scan


Pre-Setting Program

Select **Submit.**


Slide 10

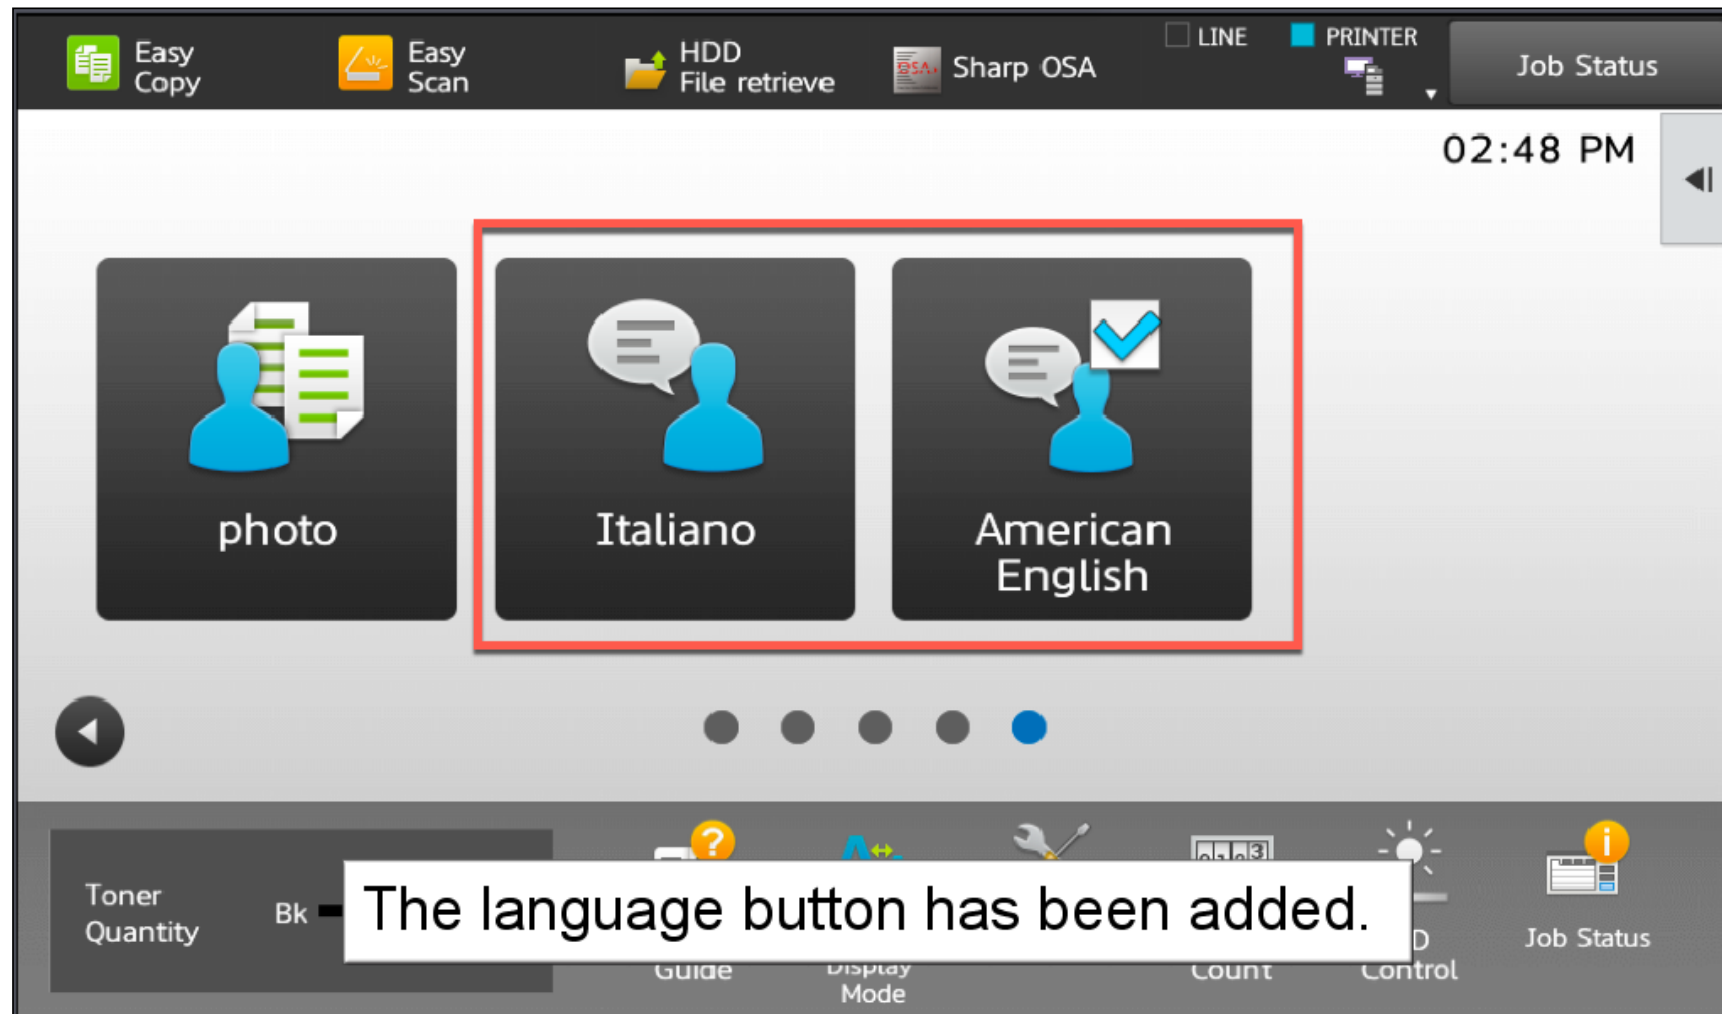

Slide 11

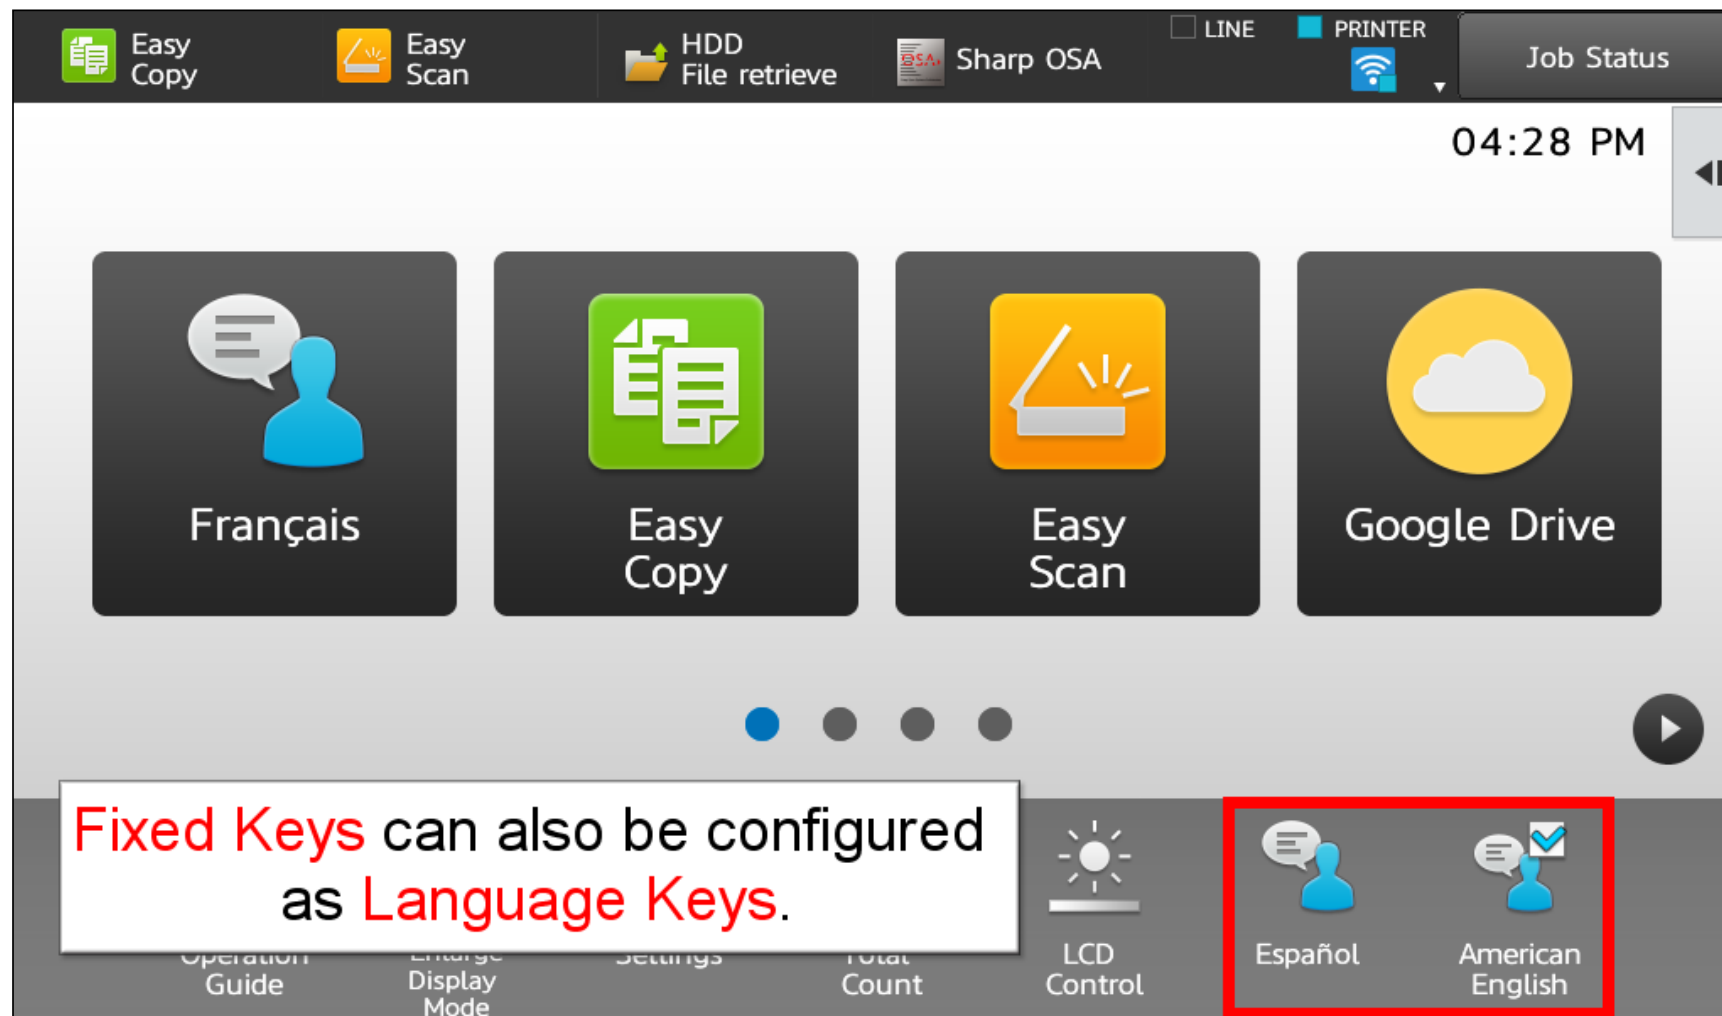

Slide 12

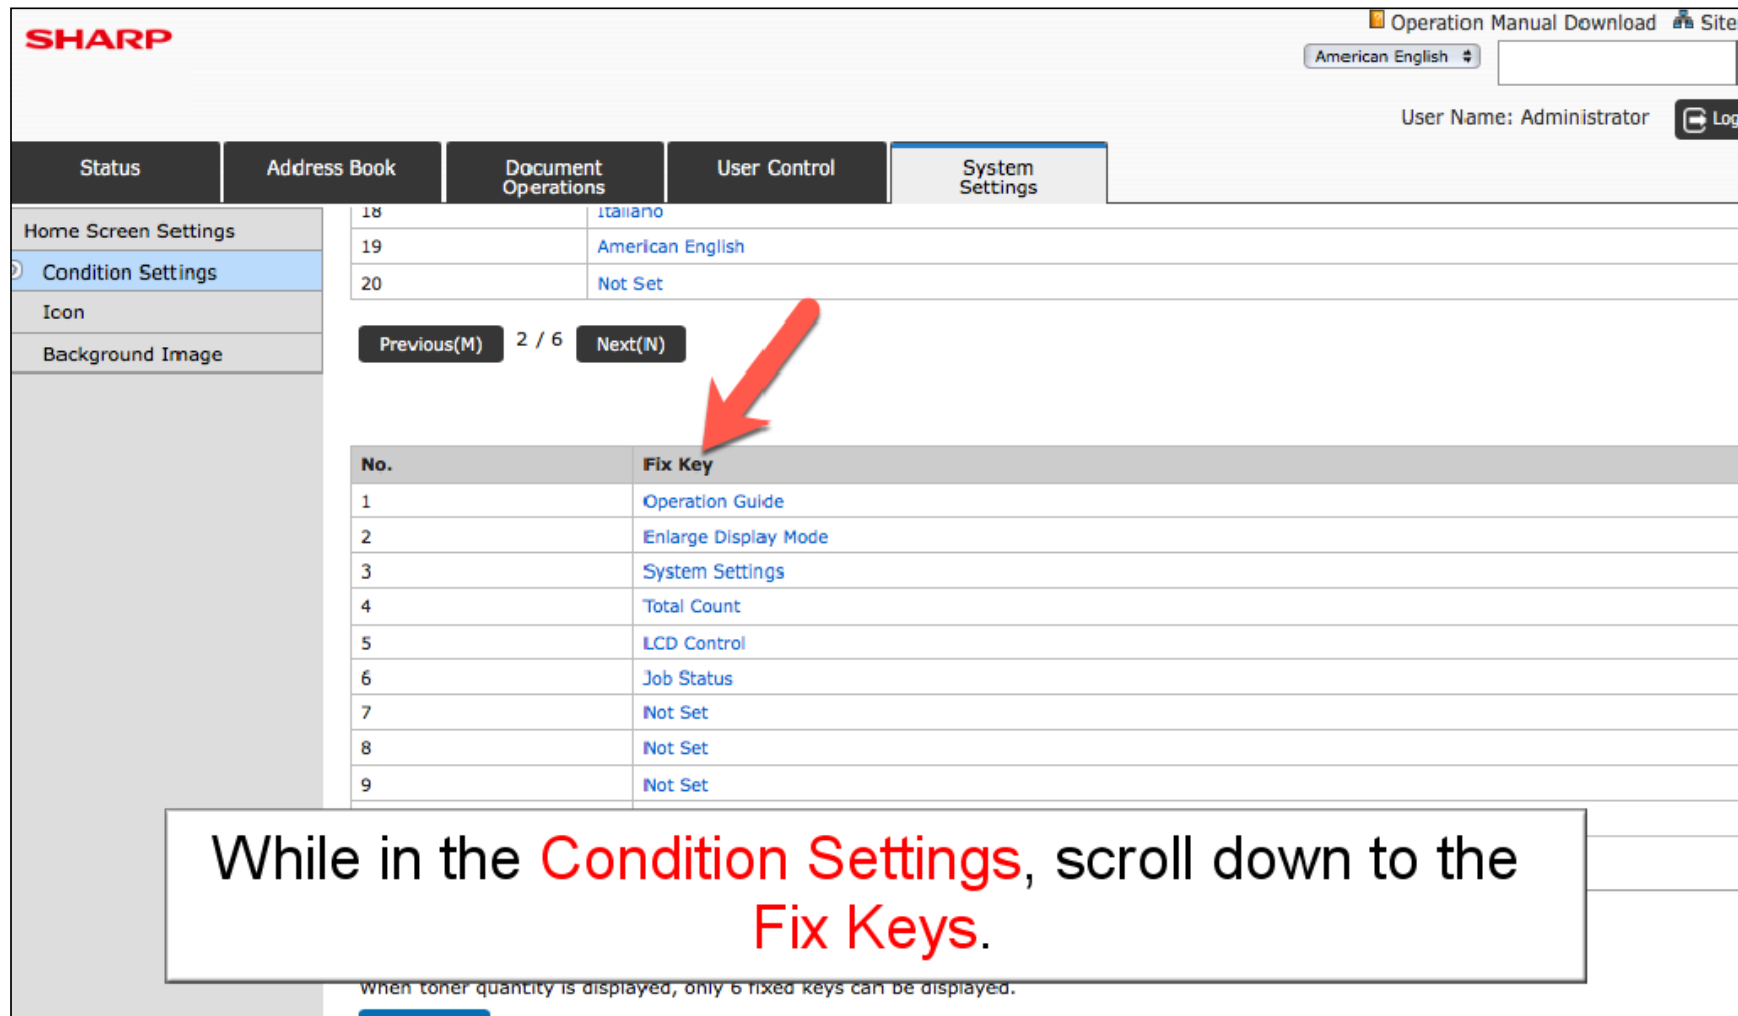

The screenshot shows the SHARP My Viewlet interface. At the top, there is a header with the SHARP logo, a language dropdown set to 'American English', and a 'Log' button. Below the header is a navigation bar with tabs: Status, Address Book, Document Operations, User Control, and System Settings. The 'System Settings' tab is active, and the 'Condition Settings' sub-tab is selected. On the left, there is a sidebar with options: Home Screen Settings, Condition Settings (selected), Icon, and Background Image. The main content area displays a table with 3 rows (18, 19, 20) and 2 columns. Below the table are 'Previous(M)' and 'Next(N)' buttons with '2 / 6' in between. A red arrow points to the 'Fix Key' section of the table below.

No.	Fix Key
1	Operation Guide
2	Enlarge Display Mode
3	System Settings
4	Total Count
5	LCD Control
6	Job Status
7	Not Set
8	Not Set
9	Not Set

While in the **Condition Settings**, scroll down to the **Fix Keys**.

When toner quantity is displayed, only 6 fixed keys can be displayed.

Slide 13

SHARP

American English

User Name: Administrator

Status Address Book Document Operations User Control System Settings

Home Screen Settings

Condition Settings

Icon

Background Image

18 Italiano

19 American English

20 Not Set

Previous(M) 2 / 6 Next(N)

No.	Fix Key
1	Operation Guide
2	Enlarge Display Mode
3	System Settings
4	Total Count
5	LCD Control
6	Job Status
7	Not Set
8	Not Set
9	Not Set
10	Not Set

Select the **Fixed Key** to be configured as a **Language Key**.

when toner quantity is displayed, only 6 fixed keys can be displayed.

Slide 14

The screenshot shows the SHARP Viewlet interface. At the top, there's a header with the SHARP logo, a language dropdown set to 'American English', and a user name 'Administrator'. Below the header is a navigation bar with tabs: Status, Address Book, Document Operations, User Control, and System Settings (which is active). Under the 'System Settings' tab, there's a list of settings: Application, Job Status, System Settings, Total Count, Paper Tray Settings, Language Setting, Custom Folder Registration, Language (selected), Enlarge Display Mode, Operation Guide, LCD Control, Google Drive, and OneDrive. On the left side, there's a sidebar with 'Home Screen Settings' and 'Condition Settings' (selected). A text box at the bottom of the screen contains the instruction: 'Scroll down to **System**. Select **Language**.'

SHARP

Operation Manual Download Site

American English

User Name: Administrator

Status Address Book Document Operations User Control System Settings

Home Screen Settings

Condition Settings

Icon

Background Image

System:

Application

Job Status

System Settings

Total Count

Paper Tray Settings

Language Setting

Custom Folder Registration

Language

Enlarge Display Mode

Operation Guide

LCD Control

Google Drive

OneDrive


External Service Connect:

日本語

Cloud Portal

Scroll down to **System**. Select **Language**.

Slide 15

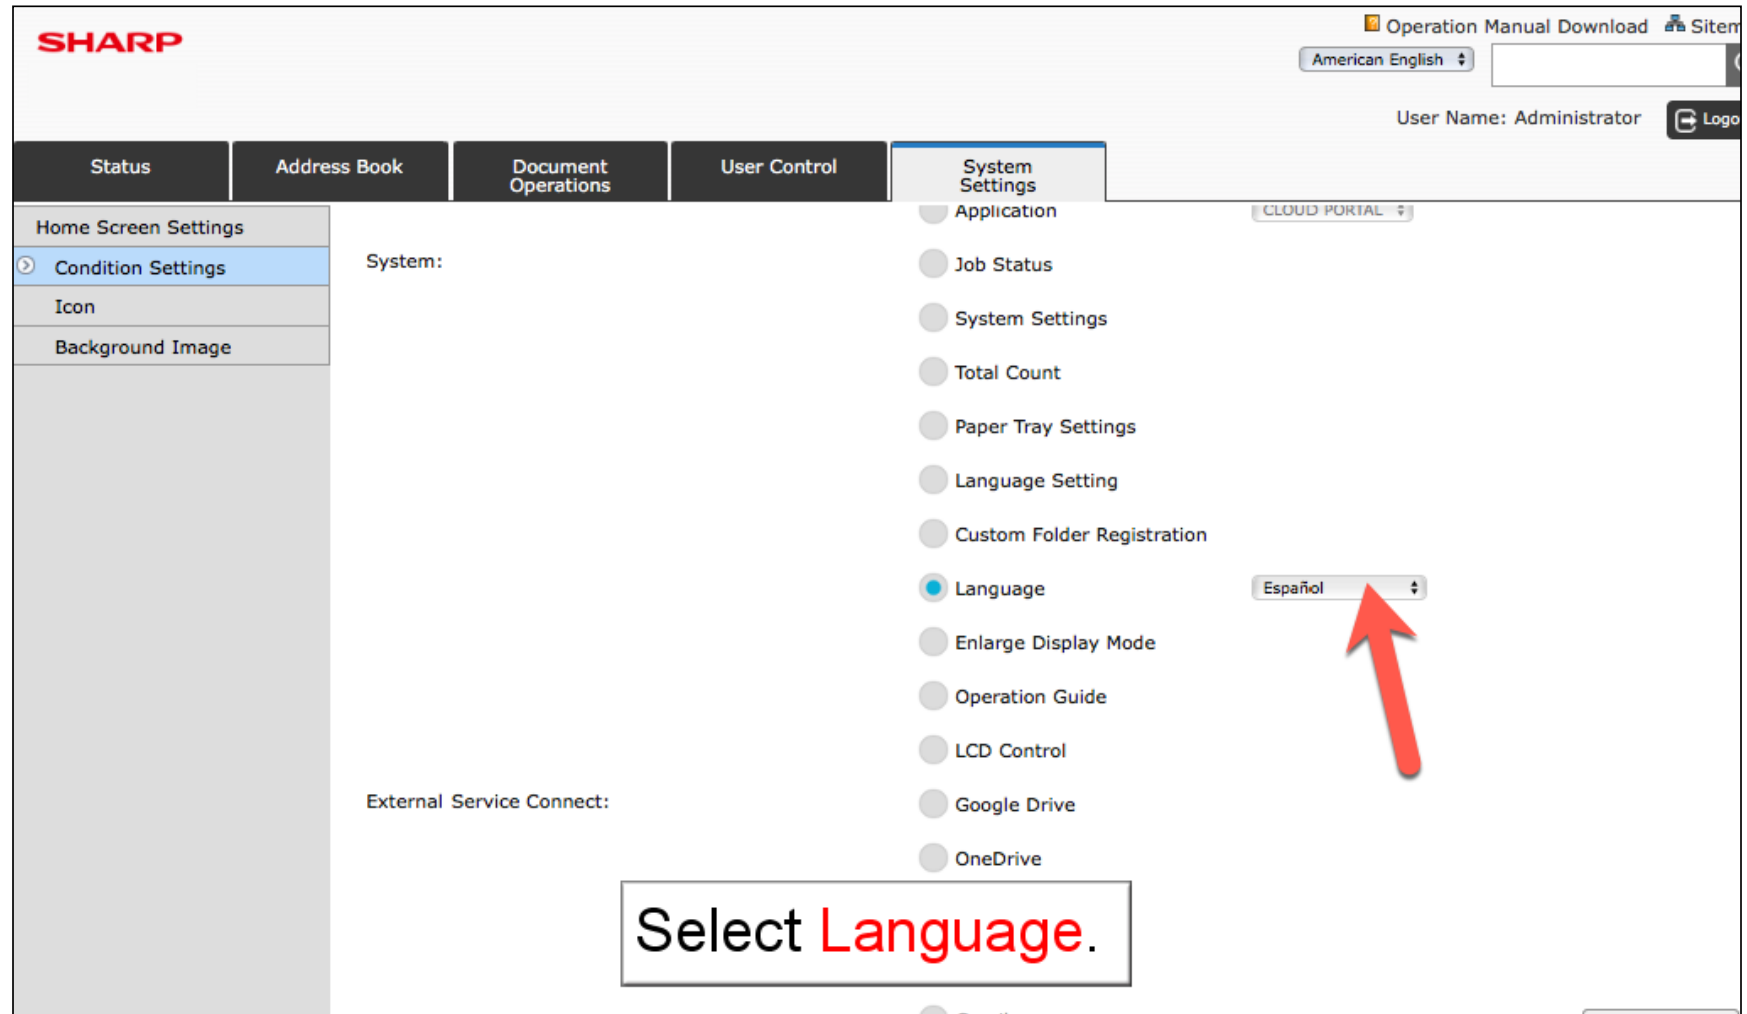

SHARP

Operation Manual Download Site

American English

User Name: Administrator

Logout

Status Address Book Document Operations User Control System Settings

Home Screen Settings

Condition Settings

Icon

Background Image

System:

Application

Job Status

System Settings

Total Count

Paper Tray Settings

Language Setting

Custom Folder Registration

Language

Enlarge Display Mode

Operation Guide

LCD Control

Google Drive

OneDrive

External Service Connect:

CLOUD PORTAL

Español

Select Language.

Slide 16

Background Image

☐ Paper Tray Settings

☐ Display Language Setting

☐ Custom Folder Registration

☒ Language

Español

☐ Enlarge Display Mode

☐ Operation Guide

☐ LCD Control

☐ Google Drive

☐ OneDrive

☐ SharePoint Online

Cloud Connect:

Key Name:

☒ Default

☐ Custom

(Up to 28 characters)


Submit(U)

Cancel(C)

^ Top of Page

Select Submit.

Slide 17

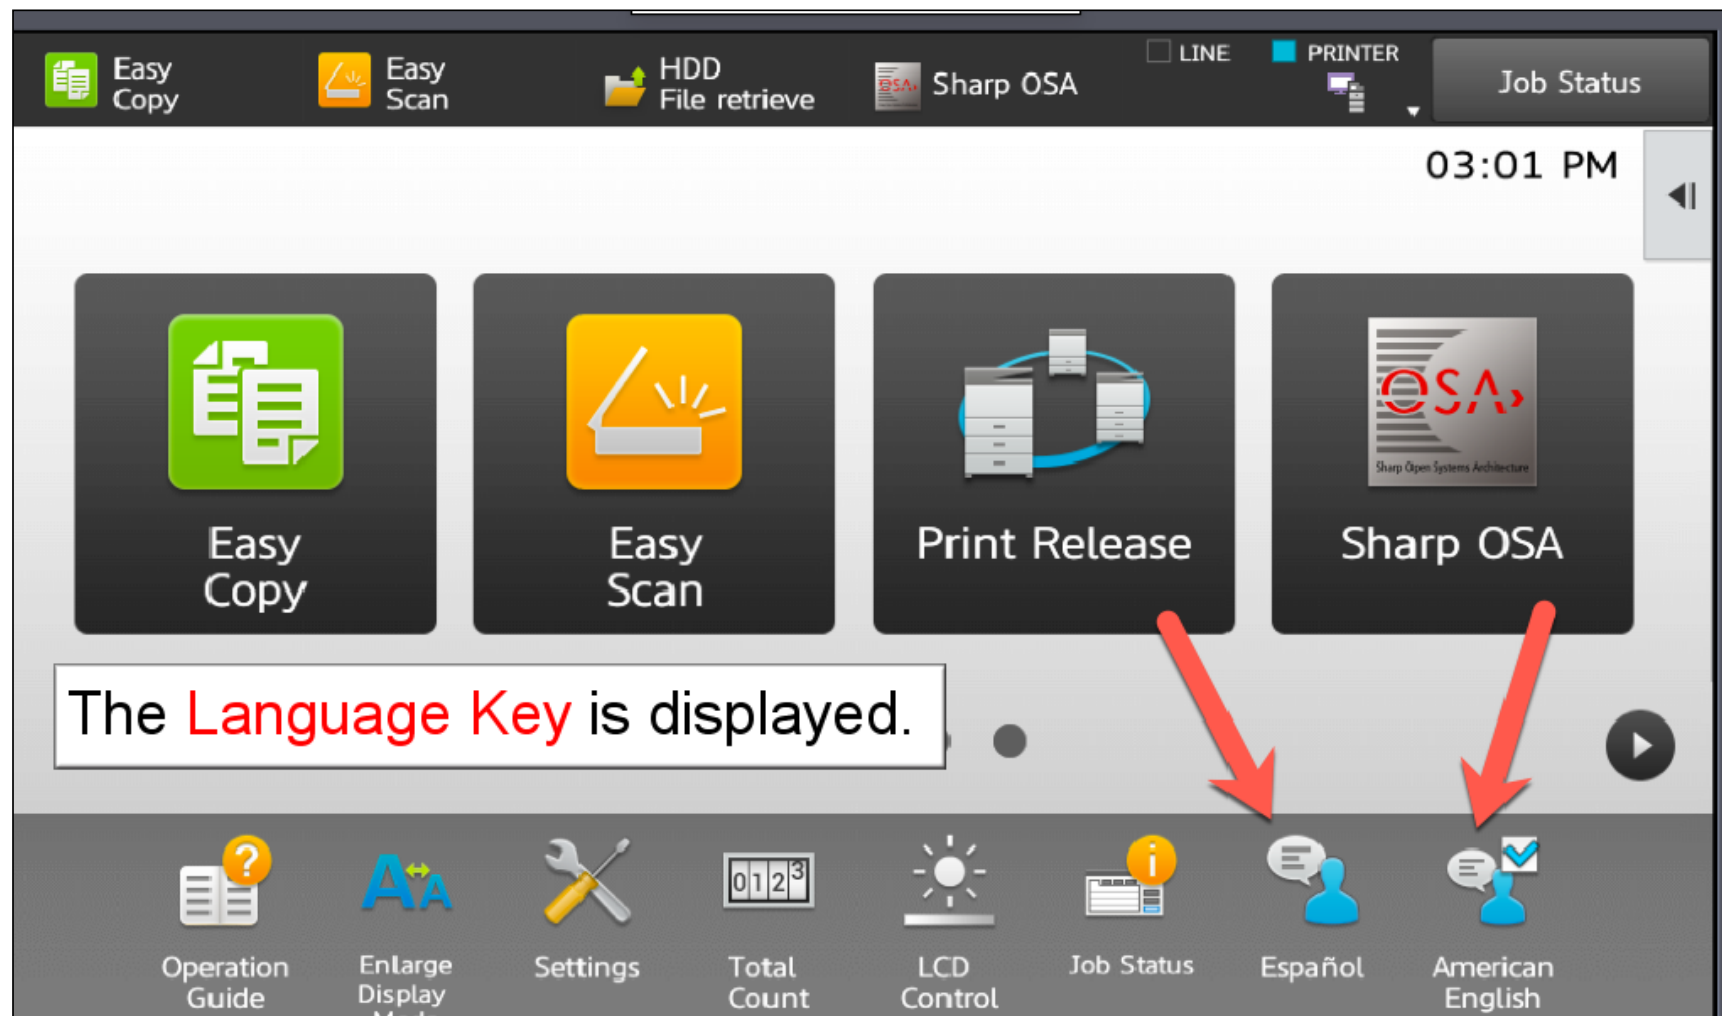

Slide 18

Congratulations, you have configured a
Multi-Language Display.



MX-B376W
MX-B476W